


Testing and Technical Information




RackGuard is also tested to specific worldwide standards -
EN 15 512 • FEM 10.2.02 • AS 4084

How the energy from a vehicle impact is calculated

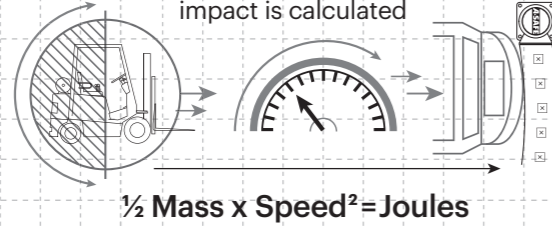

Tested Impact Energy
1,000 Joules

Equivalent vehicle and speed



Impact Test


Max Energy (Joules) **1,000**

Deflection at Max Energy 20mm

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent
** Light stability scale 1 is very poor and 8 is excellent

Racking Profiles

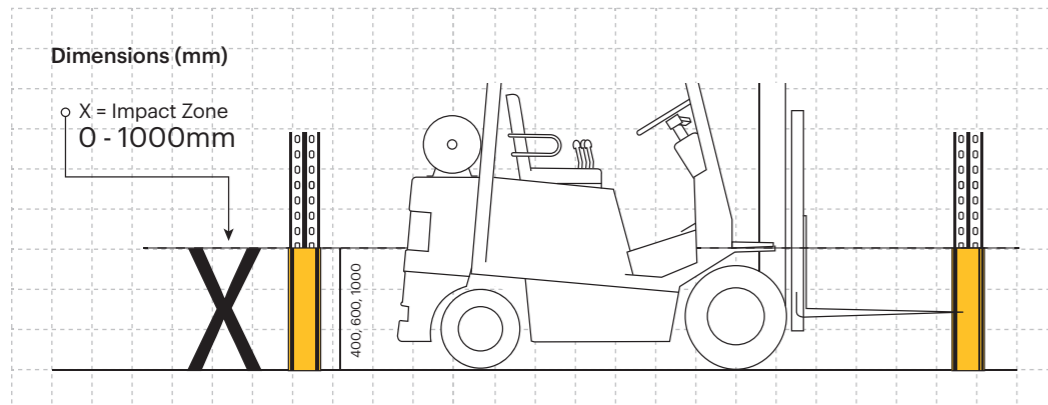


RackGuard Sizes

Description	A-Rack width (max)	B-Rack depth (max)
RackGuard (S) SL	102	45
RackGuard (S) ML	102	68
RackGuard (S) LL	102	80
RackGuard (S) SLR	85	45
RackGuard (S) MLR	85	68
RackGuard (S) LLR	85	80
RackGuard (L) SL	126	75
RackGuard (L) SLR	112	75

All RackGuards are available in 400, 600 and 1000mm heights.

Compression hinges have various widths to fit a range of racking profiles.

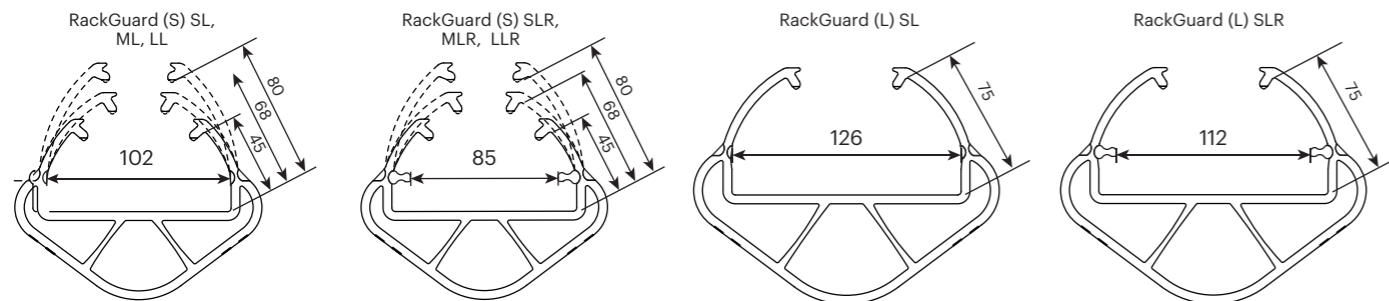

RackGuard Rack Leg Protector




Designed to protect vulnerable rack legs from front, side and scrape impacts by workplace vehicles.

RackGuard protectors absorb and deflect impacts, transferring energy around the rack leg rather than through it, preventing damage to uprights and maintaining the structural integrity of racking systems.

Frictional grip points ensure a secure fit to any sized rack leg.

RackGuard is supplied with a specially developed toolkit for ultra-fast installation.

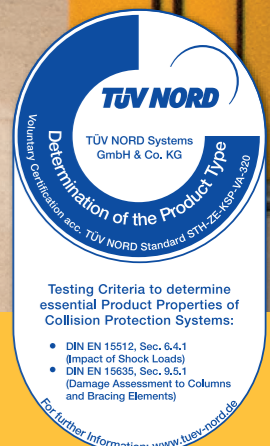

Engineered for performance

State-of-the-art products from A-SAFE are meticulously engineered to deliver the highest performance. Designed, developed, tested and manufactured in-house at our cutting-edge facility, every component is purpose-built to function flawlessly and deliver the ultimate in durability.



Memaplex™ ultimate strength polymer
is an exclusive composition of the most sophisticated polyolefins and rubber additives that have been blended by experts to provide unparalleled strength and flexibility.

Ultra-low maintenance material
is chemical and water-resistant, non-corroding, non-scratch and self-coloured, so no repainting, rusting, flaking or corrosion.

Huge return on investment
through incident prevention and downtime avoidance, thanks to resilient compression features and unique material that can withstand multiple impacts.

Advanced engineering
Molecular reorientation during manufacturing creates a unique built-in memory that enables the RackGuard to fully recover following impacts.



Ergonomically designed
with a slim profile to limit intrusion into warehouse aisles.

Self coloured and UV stabilised
for lasting high visibility, without the need for repainting.


Food safe
wipe-clean, water-resistant surface.

Eco-friendly
and 100% recyclable.

TESTED TO THE MAXIMUM

RackGuard has been rigorously tested to protect against prohibited levels of deflection. It is tested to the EN 15 512 standard and independently verified for complete peace of mind.

It also achieves the protection required in the FEM 10.2.02 and AS 4084 (Australia) standards.

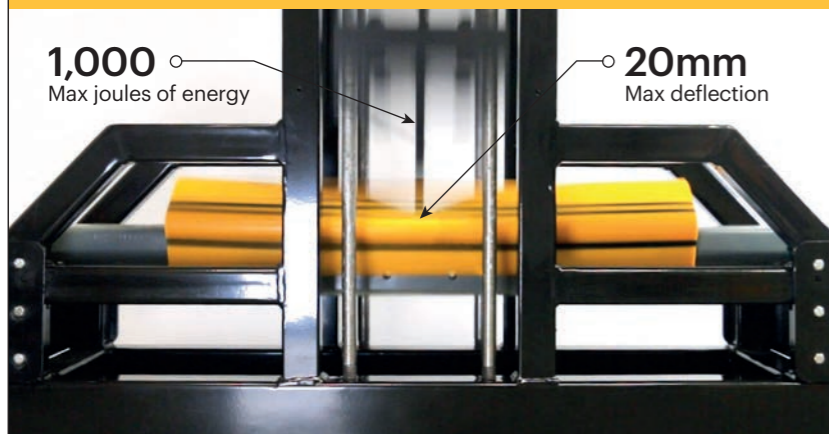

RackGuard is supplied with a specially designed toolkit to ensure it can be installed and removed easily.



RackGuards can also be installed above ground level to protect racks from loading and unloading damage.



Cold Storage option available
Purpose engineered for cold storage temperatures as low as -30°C.
See separate data sheet for details.



Dual branding option
RackGuard can be personalised with your company logo to create a unified branding experience throughout your warehouse facility. Your logo will be prominently printed above the standard A-SAFE logo on every RackGuard.