


AKUSTIK 4 + SYLOMER®

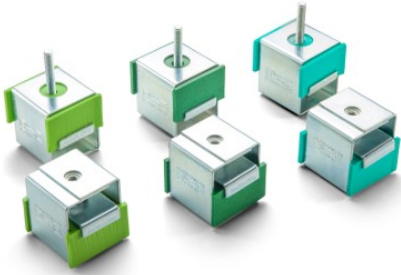


These acoustic hangers have been conceived for the suspension of false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are **manufactured in two special mixes of Sylomer®** to adapt better to the load of each application.

A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.



DRAWINGS

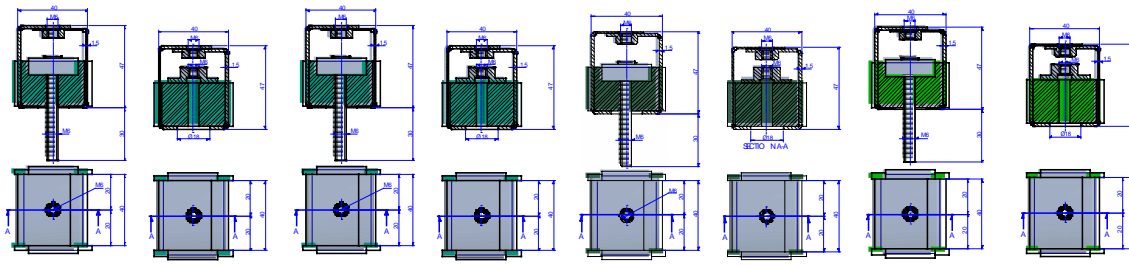


DIMENSIONS


| | Type | SUMMARY | LOAD kg MAX | Weight (kg) | Code |
|--|-------------------------------|---|----------------|----------------|-------|
| | Akustik 4 + Sylomer@15 type A | Metal armor of the Akustik 4 secured to the ceiling by an M6 screw. | 15 | 0,133 | 23187 |
| | Akustik 4 + Sylomer@15 type B | Metal armor of the Akustik Rapid secured to the ceiling by a welded M6 nut. | 15 | 0,133 | 23188 |
| | Akustik 4 + Sylomer@30 Type A | Metal armor of the Akustik 4 secured to the ceiling by an M6 screw. | 30 | 0,141 | 23505 |
| | Akustik 4 + Sylomer@30 Type B | Metal armor of the Akustik Rapid secured to the ceiling by a welded M6 nut. | 30 | 0,141 | 23513 |
| | Akustik 4 + Sylomer@50 Type A | Metal armor of the Akustik 4 secured to the ceiling by an M6 screw. | 50 | 0,141 | 23578 |
| | Akustik 4 + Sylomer@50 Type B | Metal armor of the Akustik Rapid secured to the ceiling by a welded M6 nut. | 50 | 0,141 | 23579 |
| | Akustik 4 + Sylomer@75 Type A | Metal armor of the Akustik 4 secured to the ceiling by an M6 screw. | 75 | 0,141 | 23521 |
| | Akustik 4 + Sylomer@75 Type B | Metal armor of the Akustik Rapid secured to the ceiling by a welded M6 nut. | 75 | 0,141 | 23529 |

Elastical properties


LOAD-DEFLECTION GRAPH
Akustik + Sylomer 15

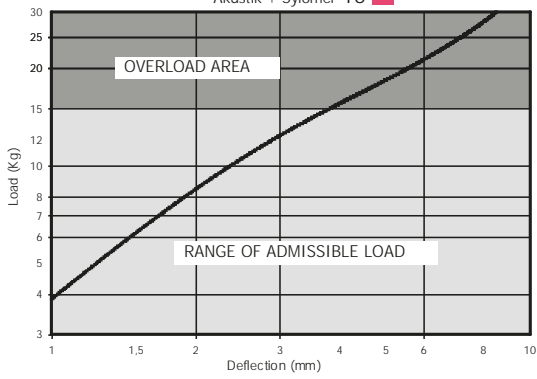


NATURAL FREQUENCY GRAPHS
Akustik + Sylomer 15

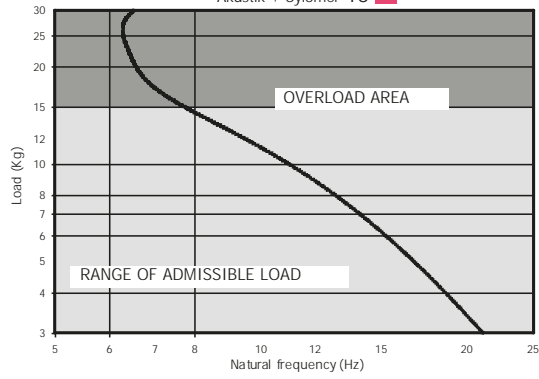


Akustik + Sylomer 30

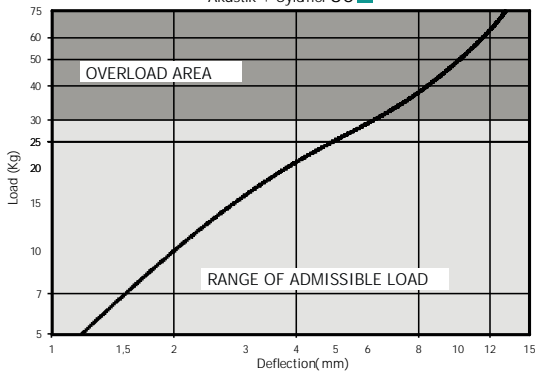


Akustik + Sylomer 30

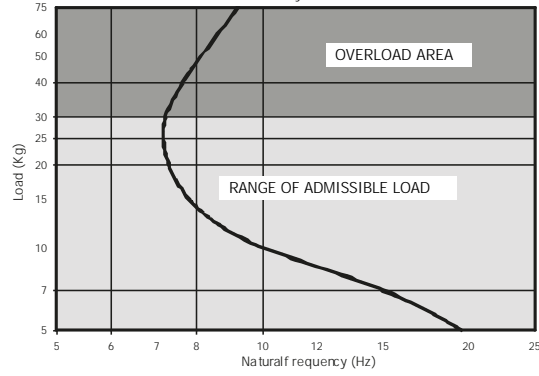


Akustik + Sylomer 50

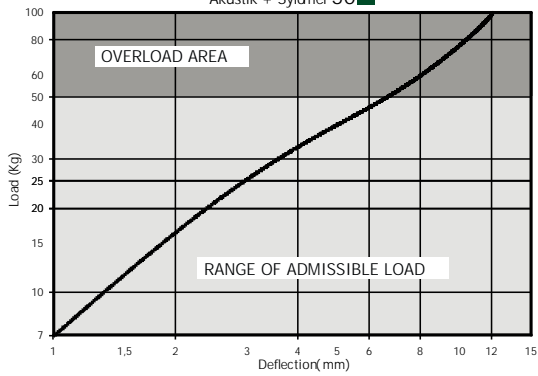


Akustik + Sylomer 50

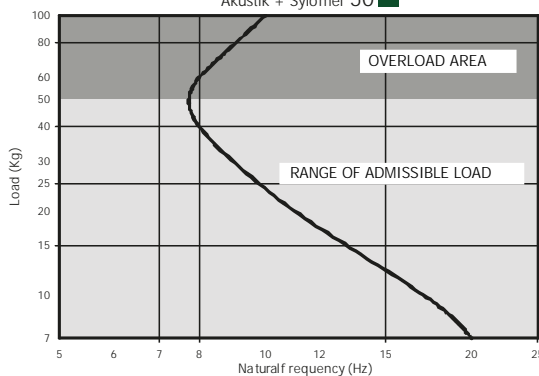

Akustik + Sylomer 75

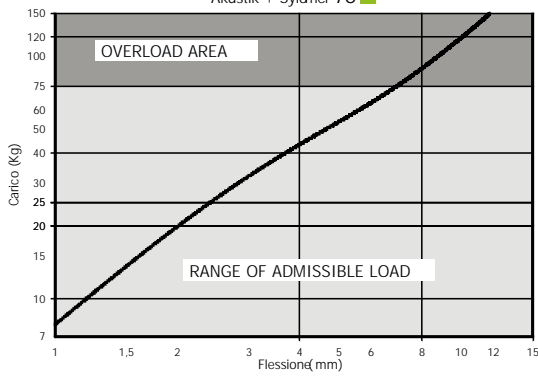

Akustik + Sylomer 75

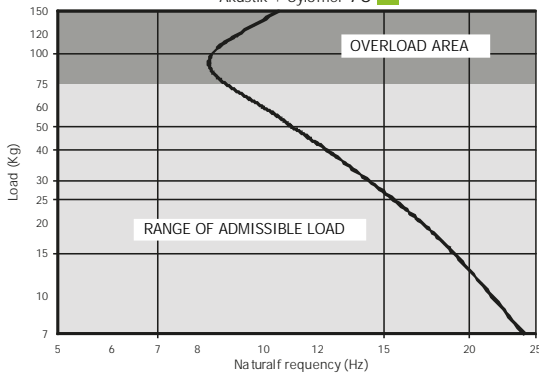

Rubber Metal anti vibration mounts

AKUSTIK 4 + SYLOMER®