


AKUSTIK PIPE

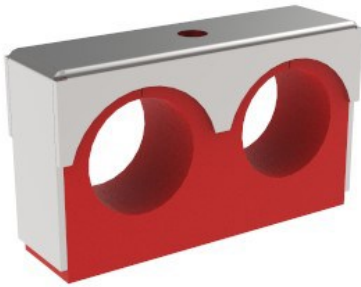

AMC-MECANOCAUCHO® Akustik Pipe consist in a double-hole Sylomer part enclosed in a steel housing.

The assembly of this mounting is very simple due to the easily removable Sylomer part and its single fastening hole. The uncovered distance by the housing determines the preload of the Akustik Pipe, allowing the bolt to be tightened until the housing is firmly in contact with the base.

AMC-MECANOCAUCHO® Akustik Pipes are specially suitable for applications where rigid or flexible pipes must be isolated, both for static and dynamic applications.

TECHNICAL CHARACTERISTICS

Advantages

- Compact design
- Fail-safe feature
- Multidirectional mount
- Excellent noise isolation
- Corrosion resistant
- Maintenance-free
- No aging


APPLICATIONS

- Construction machinery
- Mining equipment
- Buses
- HVAC equipment
- Hydraulic equipment



AKUSTIK PIPE


DRAWINGS

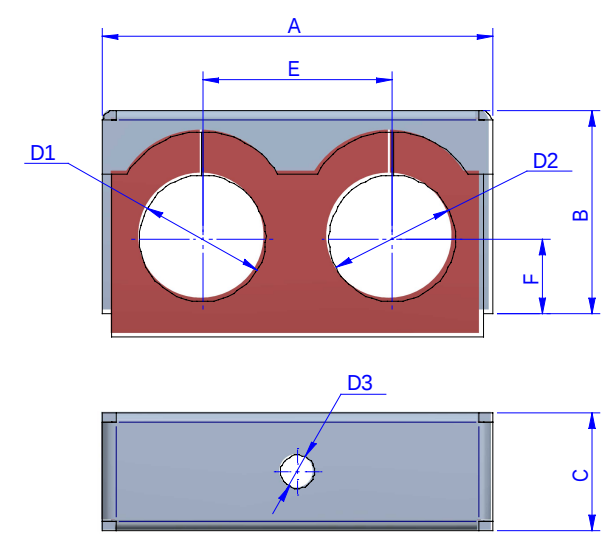

DIMENSIONS

Type	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D1 (Min.)	D2 (Max.)	D3 (Max.)	Code
Type A	70	34,5	29	36	15	15	18	8,5	23872
	70	34,5	29	36	15	18	18	8,5	23873
	82	42	29	43	15	21,2	24,3	8,5	23874
	70	34,5	29	36	13	22	22	8,5	23871
	98	51,5	29	48	21	28	28	8,5	23876
	98	51,5	29	48	21	32	32	8,5	23875

DRAWINGS

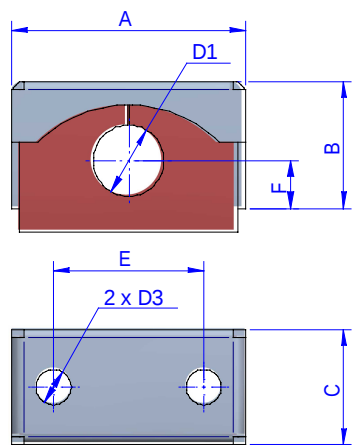

DIMENSIONS

Type	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D1 (Min.)	D2 (Max.)	D3 (Max.)	Code
Type B	59	32	29	38	12	18	-	9	23877

Elastical properties

LOAD-DEFLECTION

