



EP 700 + SYLOMER®



Acoustic wall ties range designed for the floating suspension of soundproofed walls. Sylomer® avoids the transmission of vibrations while providing optimal acoustic results. They have a "FAIL SAFE" rugged metal structure, which is overload-proof. Recommended for applications where fire or impact resistance is necessary. These mounts are also suitable for the isolation of vertical pipes, or any type of lightweight ducts that need to be isolated.











DRAWINGS

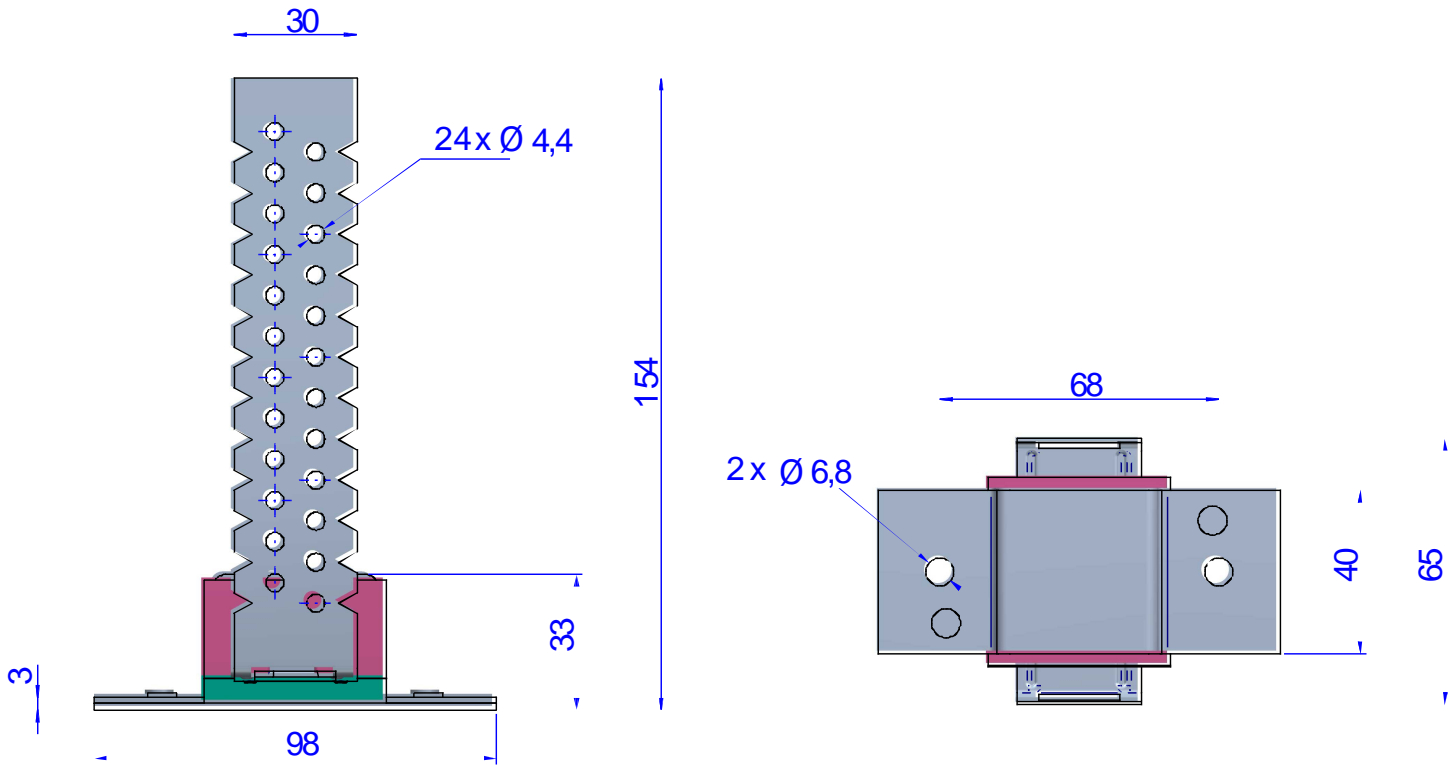

DIMENSIONS

| | Type | SUMMARY | Weight (kg) | Max. Load (kg) | Code |
|--|---------------------|--|-------------|----------------|-------|
| | EP 700 + Sylomer 15 | They are secured by two "predrilled" and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique. | 0,2 | 15 | 23727 |
| | EP 700 + Sylomer 30 | They are secured by two "predrilled" and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique. | 0,28 | 30 | 23711 |
| | EP 700 + Sylomer 50 | They are secured by two "predrilled" and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique. | 0,2 | 50 | 23728 |
| | EP 700 + Sylomer 75 | They are secured by two "predrilled" and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique. | 0,28 | 75 | 23712 |

Elastical properties

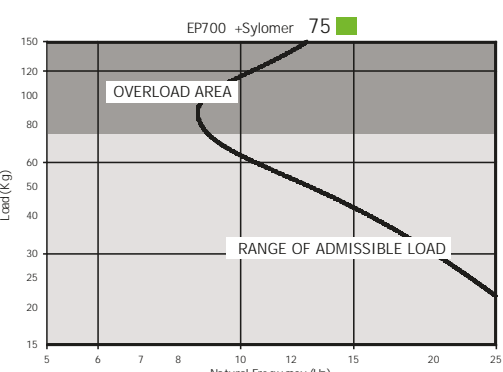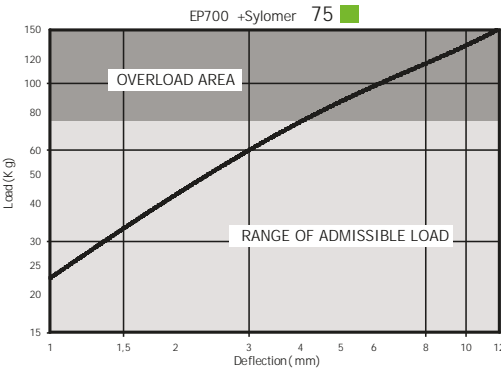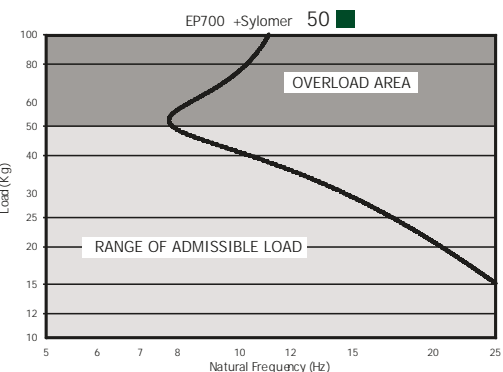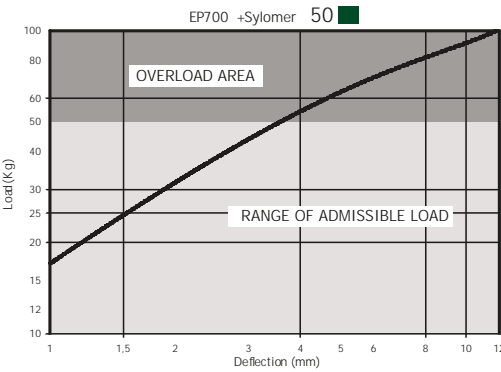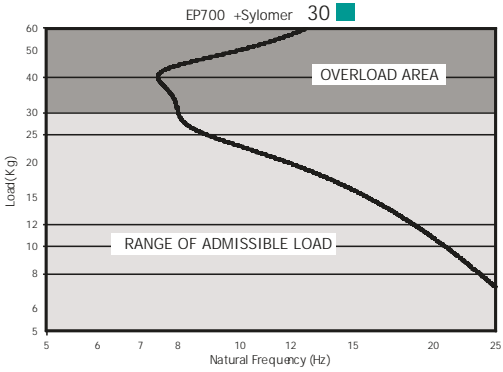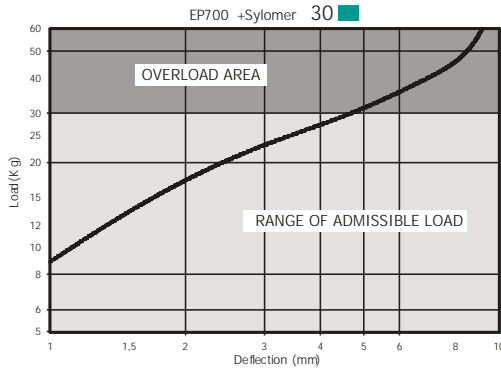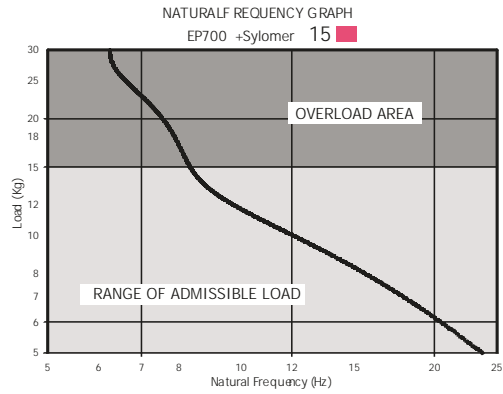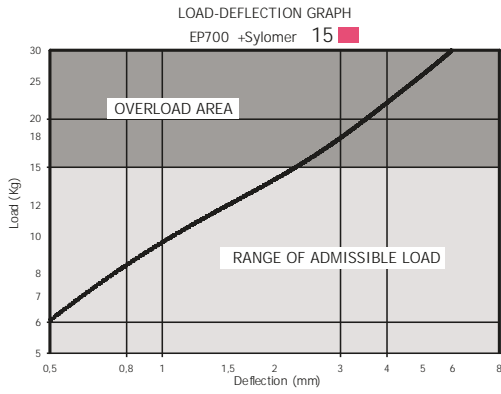

Rubber Metal anti vibration mounts

EP 700 + SYLOMER®