


SPRINGTEC TYPE 2



Range designed for suspensions of suspended acoustic ceilings and machinery working at more than 450 r.p.m. Manufactured with piano tail quality spring of great mechanical resistance guided by two rubber plates with integral end stops to prevent contact between spirals when overloading.



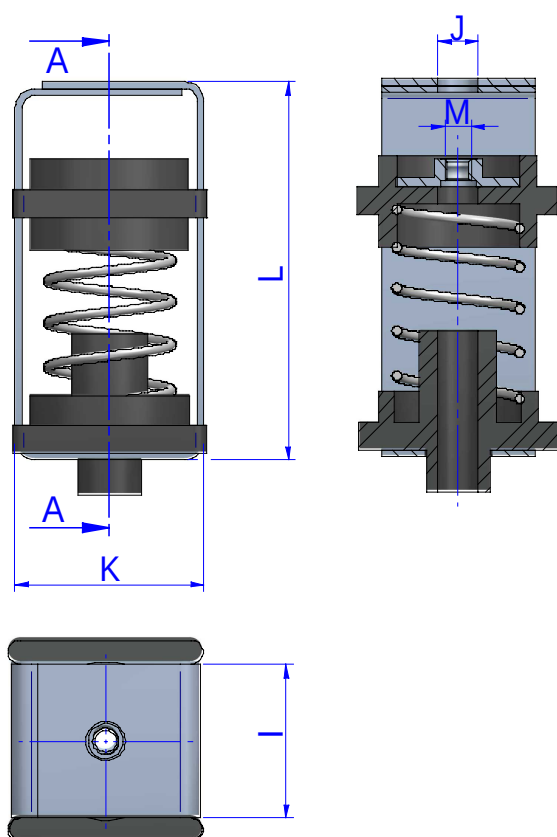

DIMENSIONS

	Type	MAX PERMANENT LOAD	Spring color	I (mm)	J (mm)	K (mm)	L (mm)	M	Weight (kg)	Code
	Springtec ST-5 Type 2	5	Silver	35	Ø 9	43	86	M-6	0,164	23314
	Springtec ST-10 Type 2	10	White	35	Ø 9	43	86	M-8	-	23330
				35	Ø 9	43	86	M-6	0,164	23305
	Springtec ST-20 Type 2	20	Yellow	35	Ø 9	43	86	M-8	-	23332
				35	Ø 9	43	86	M-6	0,167	23307
	Springtec ST-30 Type 2	30	Blue	35	Ø 9	43	86	M-8	-	23325
				35	Ø 9	43	86	M-6	0,162	23309
	Springtec ST-60 Type 2	60	Magenta	35	Ø 9	43	86	M-6	0,198	23311

Elastical properties

