


AMC MECANOCAUCHO®

SOLUTIONS FOR GYMS



by getzner
sylomer®


Sylomer GYM Dry Floor Base

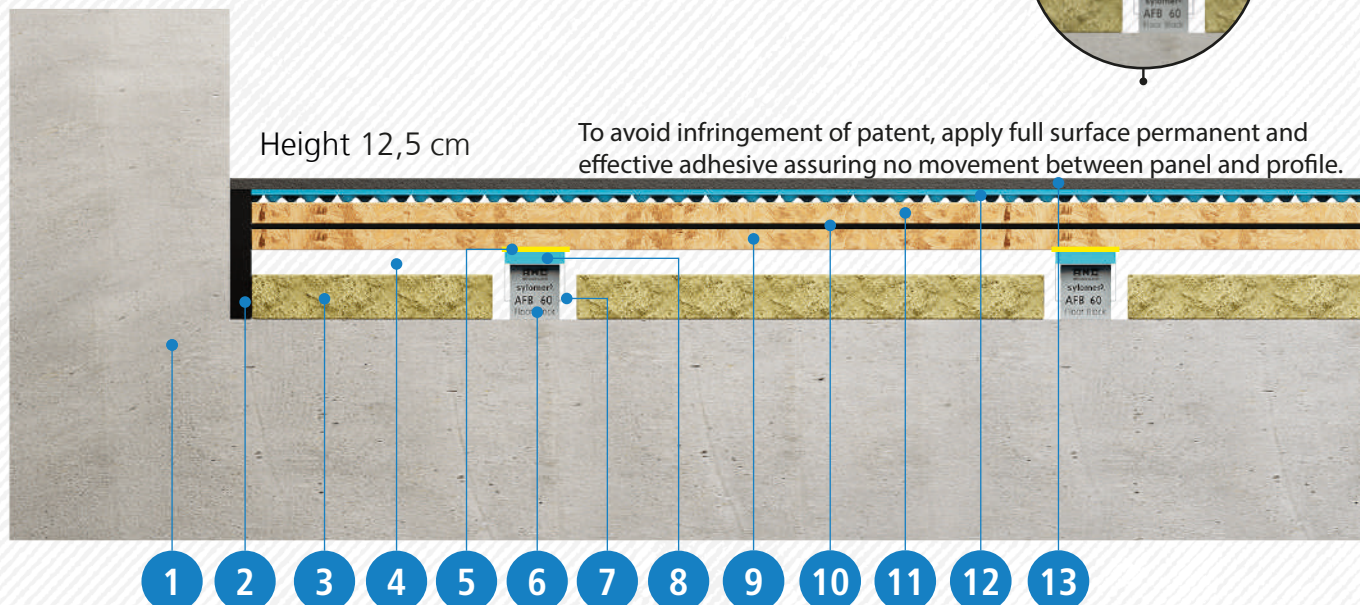


- | | | |
|---------------------------------|---------------------------|--------------------------------|
| 1 Structural slab - 140mm | 6 AFB Floor Block | 11 OSB Board Type 3 - 18mm |
| 2 Perimeter insulation | 7 Placo® Rigi 60 | 12 Getzner Mat 29 |
| 3 Rock wool | 8 Sylomer® | 13 Rubber sports surface -15mm |
| 4 Air gap | 9 OSB Board Type 3 - 18mm | |
| 5 Permanent fixation - Adhesive | 10 Tabiabsorber 5 | |

AMC does not make installations of this system.

Impact noise improvement according to EN ISO 10140-3

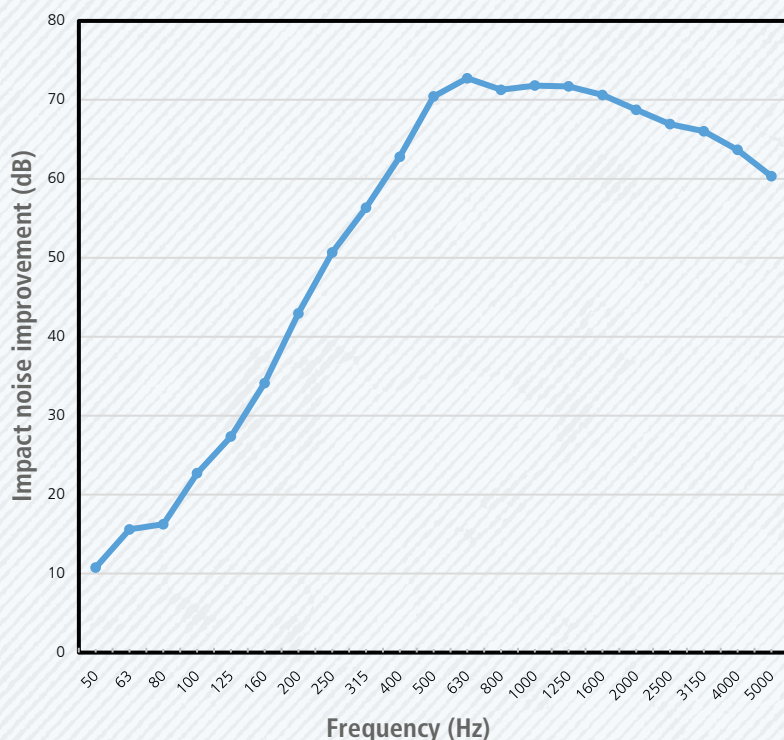

Solution for energy range between 0 and 225J.

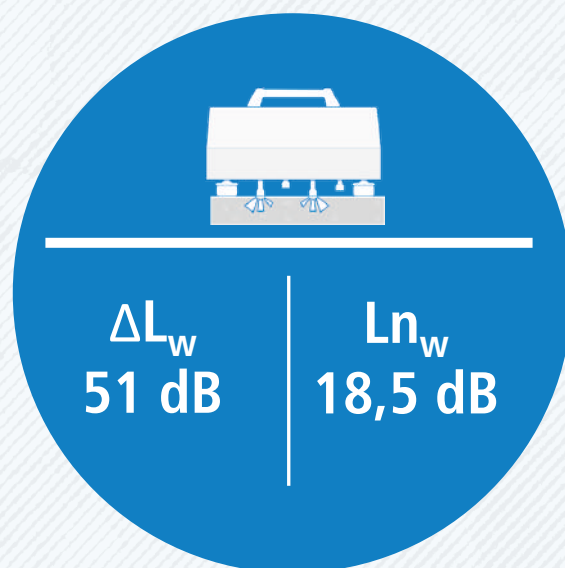

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19




sales@amcsa.es



www.mecanocaucho.com
www.akustik.com


Sylomer GYM Dry Floor Advance

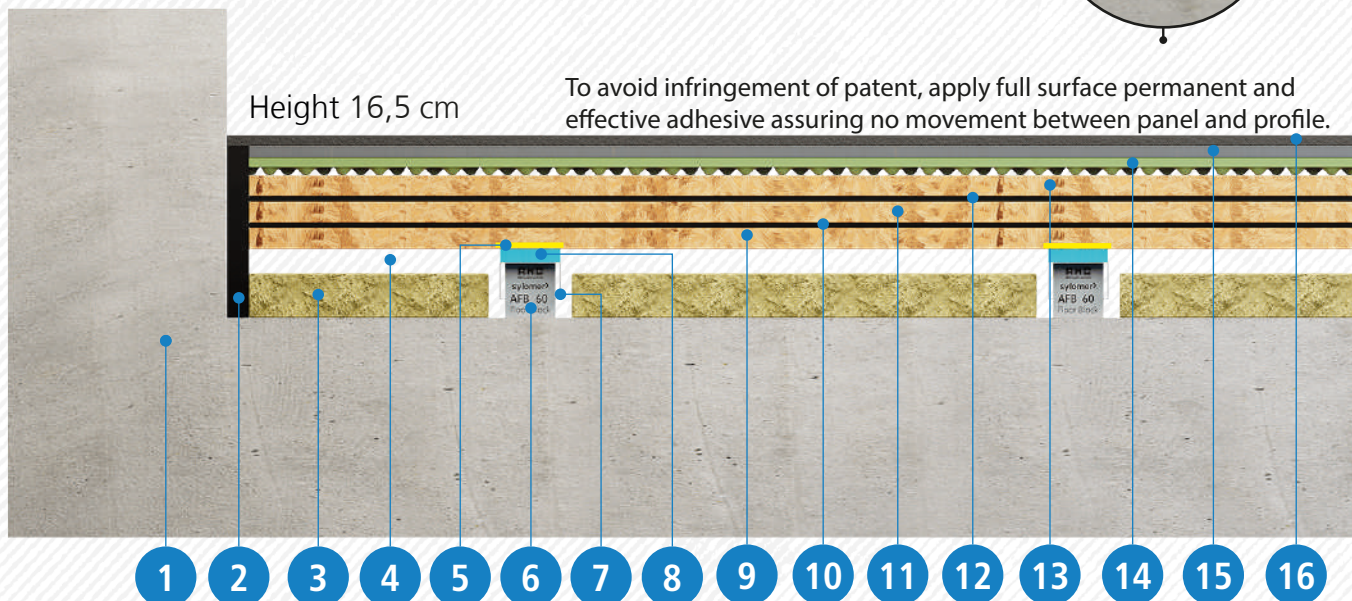

- | | | |
|---------------------------------|----------------------------|--------------------------------|
| 1 Structural slab - 140mm | 7 Placo® Rigi 60 | 13 OSB Board Type 3 - 18mm |
| 2 Perimeter insulation | 8 Sylomer® | 14 Getzner Mat 33 |
| 3 Rock wool | 9 OSB Board Type 3 - 18mm | 15 Shock Absorb Base |
| 4 Air gap | 10 Tabiabsorber 5 | 16 Rubber sports surface -15mm |
| 5 Permanent fixation - Adhesive | 11 OSB Board Type 3 - 18mm | |
| 6 AFB Floor Block | 12 Tabiabsorber 5 | |

AMC does not make installations of this system.

Impact noise improvement according to EN ISO 10140-3

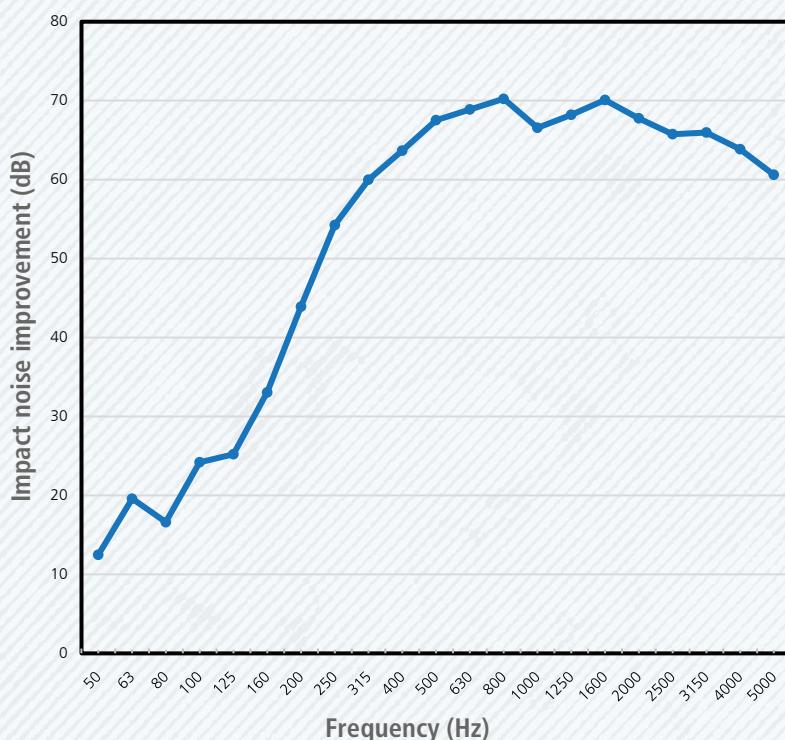


Solution for energy range between 0 and 550J.





Sylomer GYM Dry Floor Pro

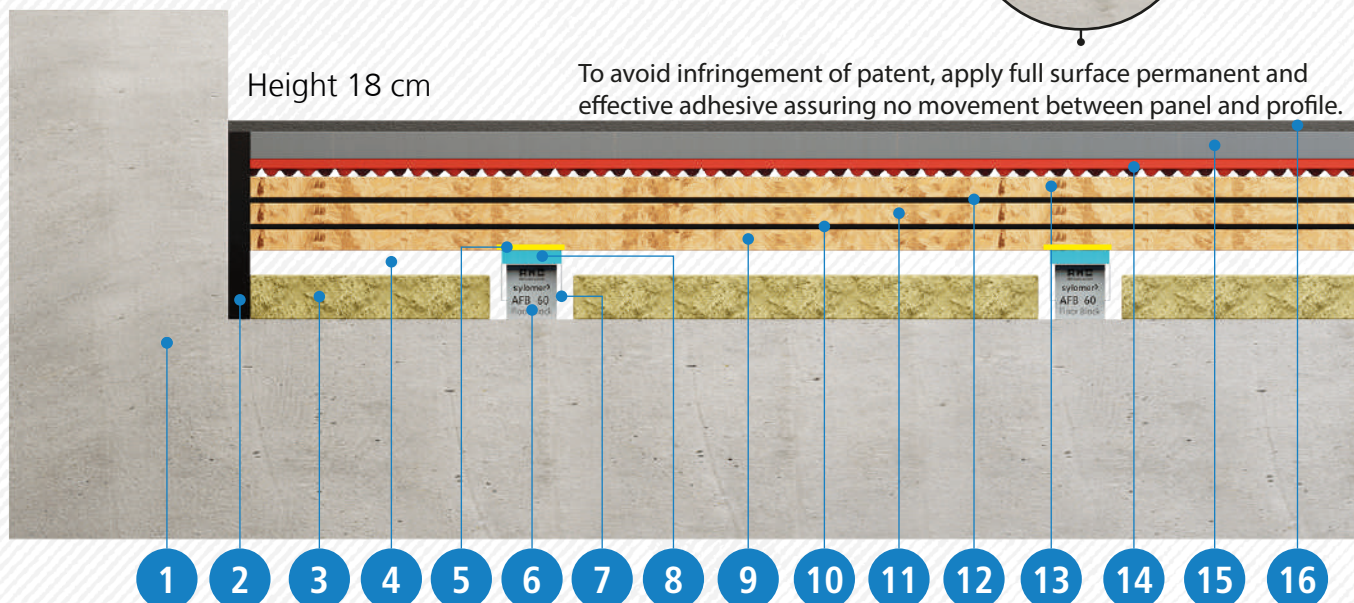


To avoid infringement of patent, apply full surface permanent and effective adhesive assuring no movement between panel and profile.


- | | | |
|---------------------------------|----------------------------|--------------------------------|
| 1 Structural slab - 140mm | 7 Placo® Rigi 60 | 13 OSB Board Type 3 - 18mm |
| 2 Perimeter insulation | 8 Sylomer® | 14 Getzner Mat 35 |
| 3 Rock wool | 9 OSB Board Type 3 - 18mm | 15 Shock Absorb Advanced |
| 4 Air gap | 10 Tabiabsorber 5 | 16 Rubber sports surface -15mm |
| 5 Permanent fixation - Adhesive | 11 OSB Board Type 3 - 18mm | |
| 6 AFB Floor Block | 12 Tabiabsorber 5 | |

AMC does not make installations of this system.

Impact noise improvement according to EN ISO 10140-3

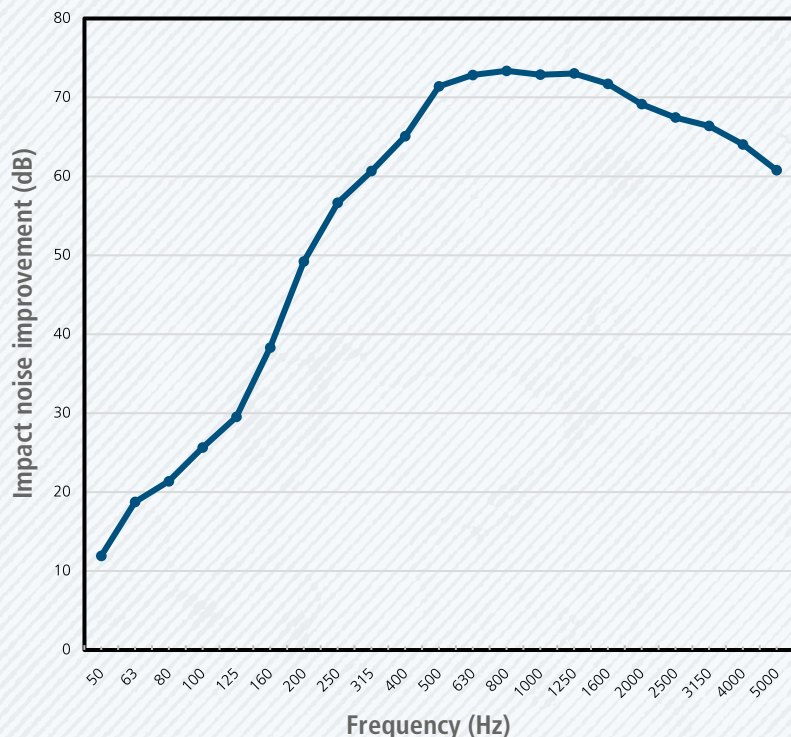

Solution for energy range between 0 and 550J.

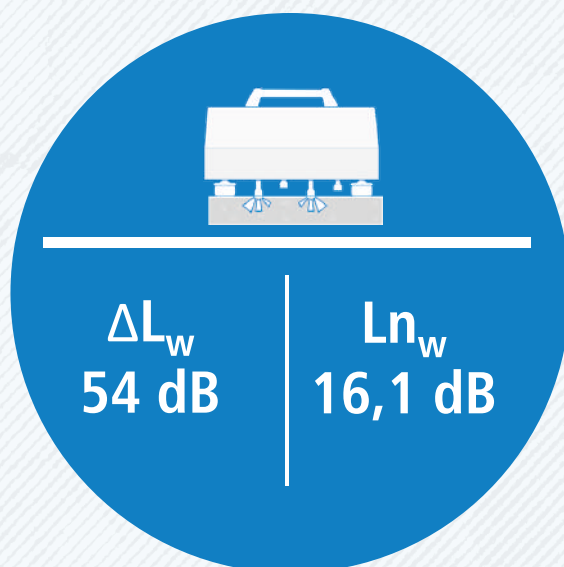

AMC MECANOCACHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19



sales@amcsa.es





www.mecanocaucho.com
www.akustik.com



Noise level with free fall of weights

Tests carried out in Audiotec.

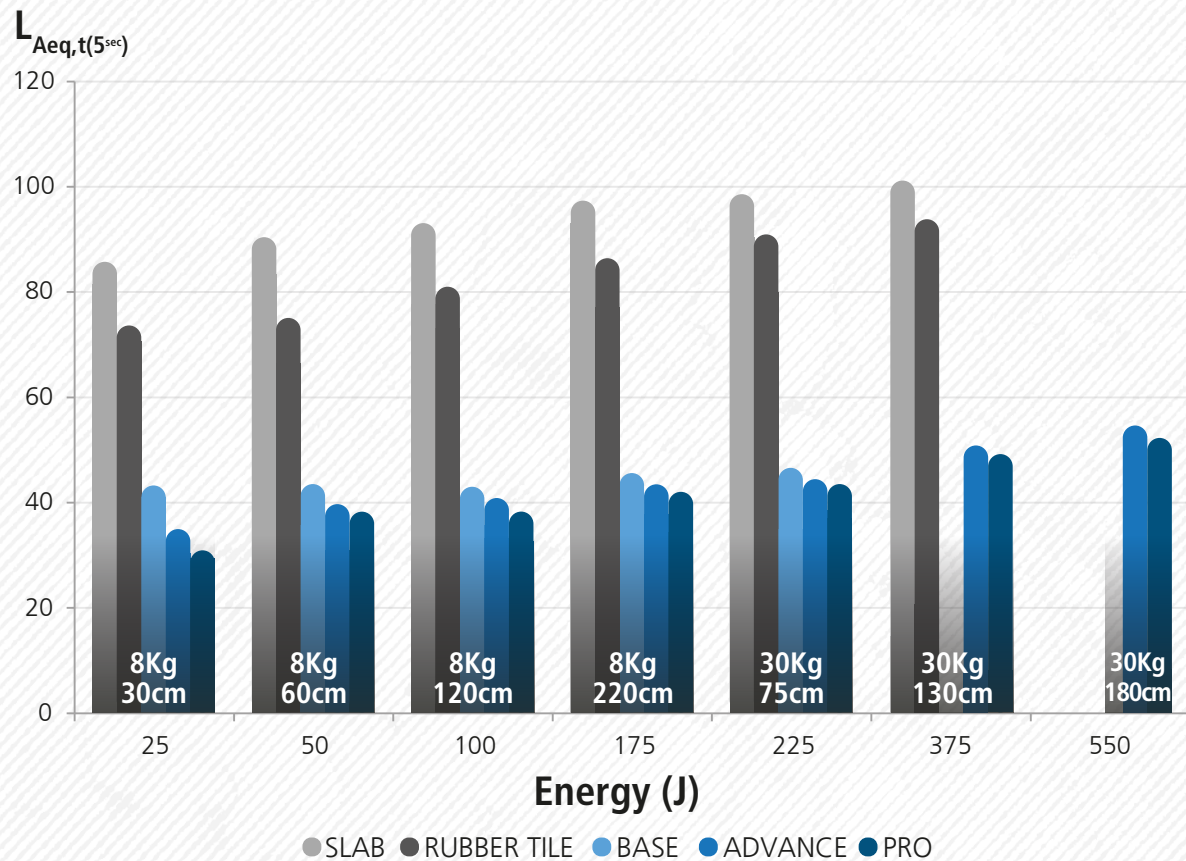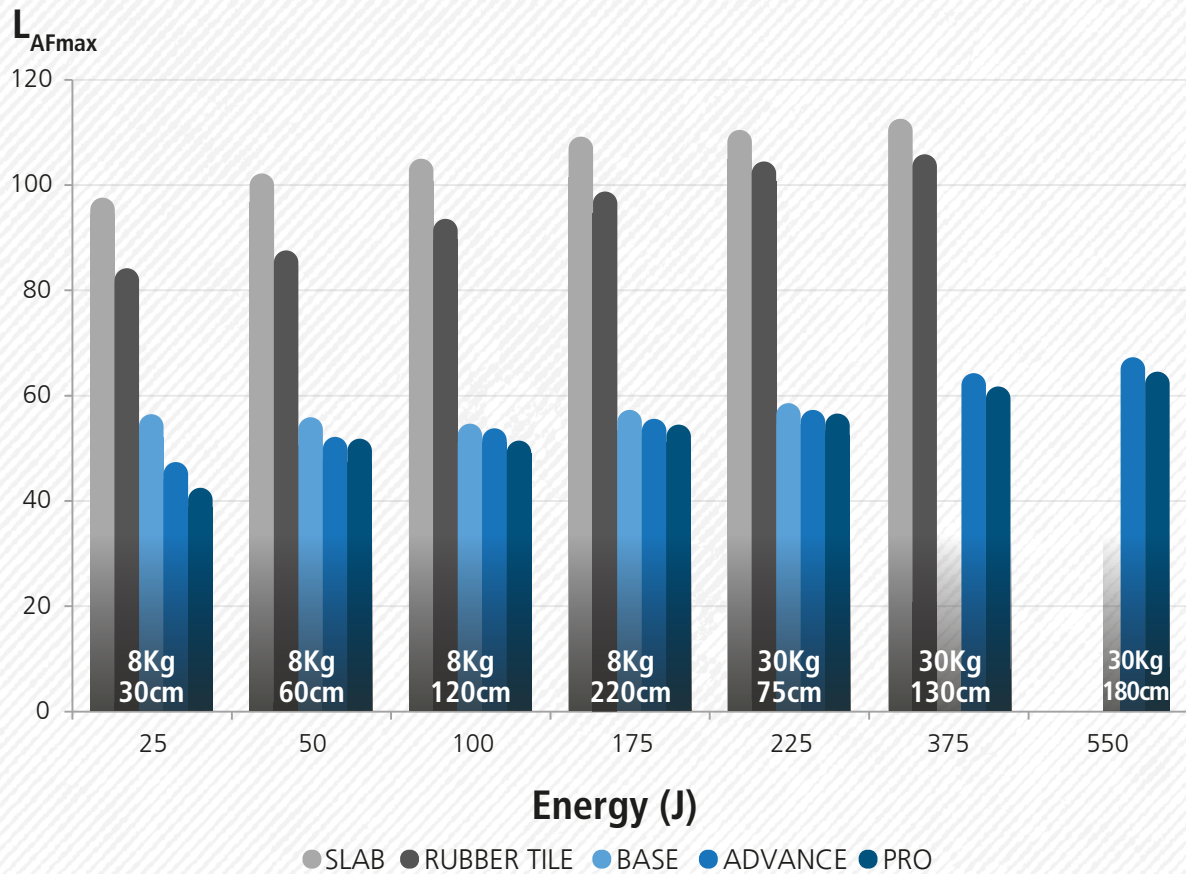

*Test report available upon request.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19



sales@amcsa.es




www.mecanocaucho.com
www.akustik.com




Normalized impact noise isolation

Tests carried out in Audiotec UNE EN ISO 10140-1:2016.

Impact noise results

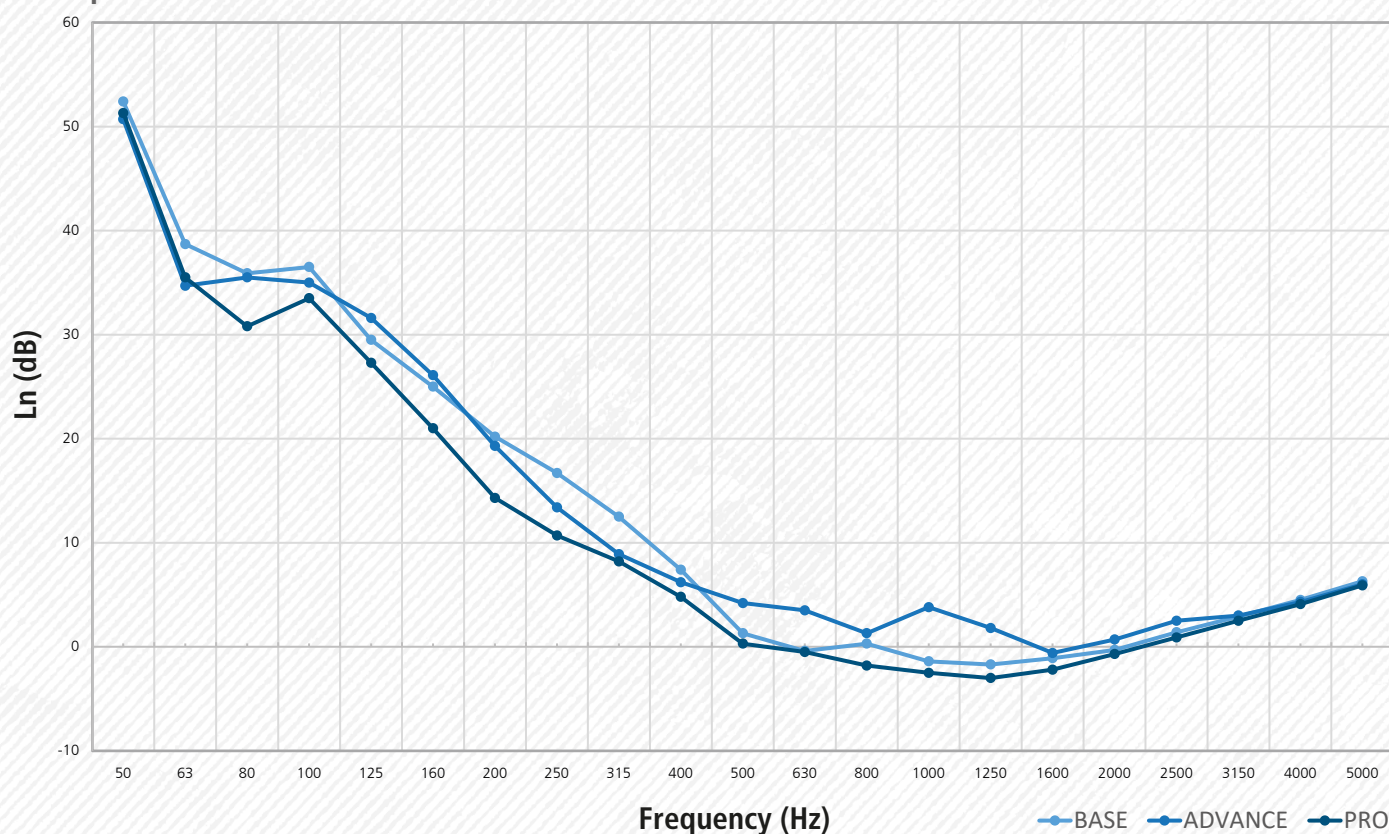

Impact noise improvement results

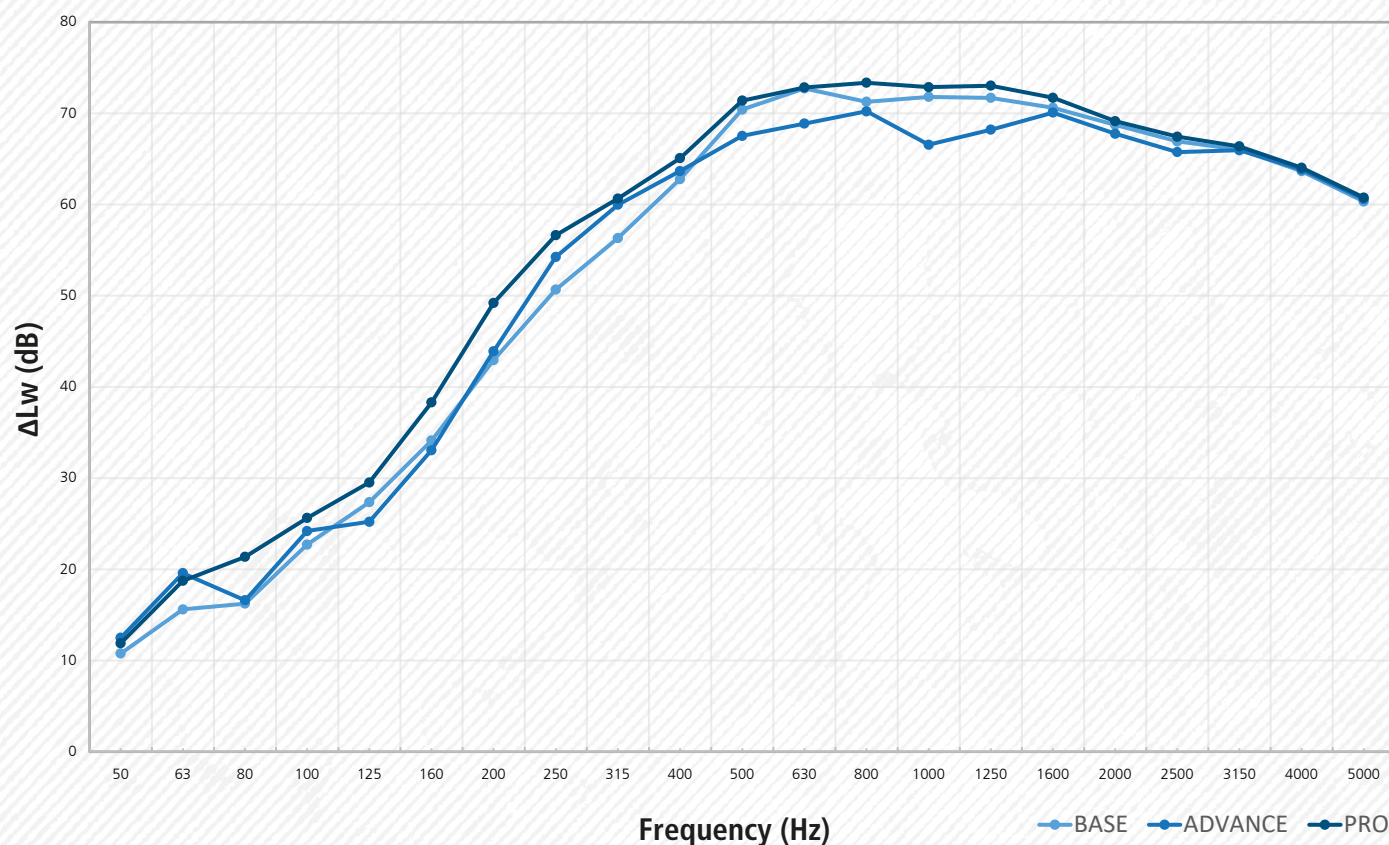

*Test report available upon request.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19




sales@amcsa.es



www.mecanocaucho.com
www.akustik.com



AFS GYM Dry Floor Base

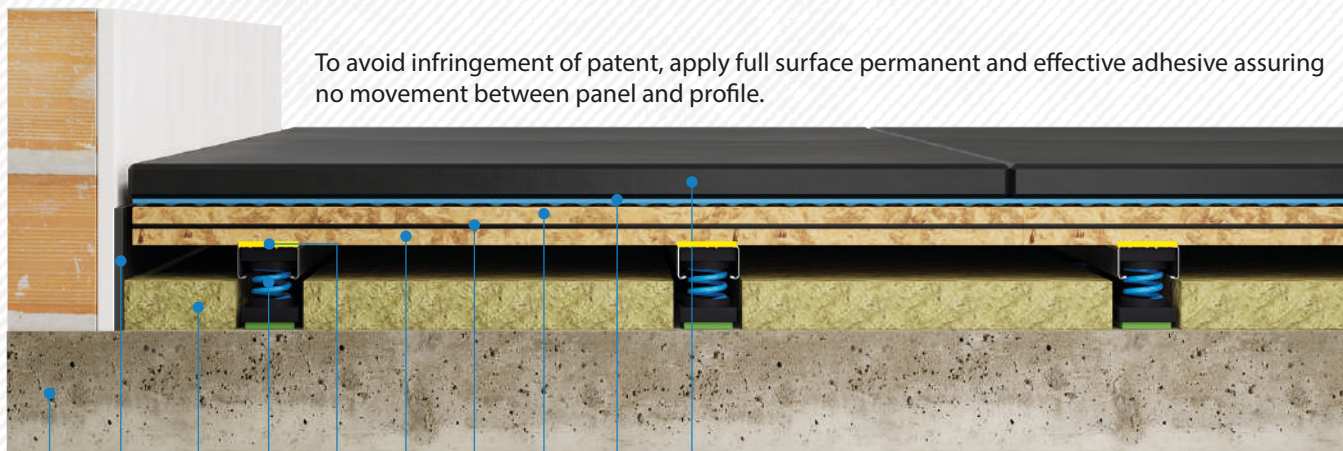

To avoid infringement of patent, apply full surface permanent and effective adhesive assuring no movement between panel and profile.

1 2 3 4 5 6 7 8 9 10

1 Structural slab - 140mm

2 Perimeter insulation

3 Rock wool - 48mm

4 AFS + Sylomer - 95mm

5 Permanent fixation - Adhesive

6 OSB Board Type 3 - 18mm

7 Tabiabsorber 5 - 5mm



8 OSB Board Type 3 - 18mm

9 Getzner Mat 29 - 11mm

10 Rubber sports surface - 15mm

AMC does not make installations of this system.

Impact noise improvement according to EN ISO 10140-3

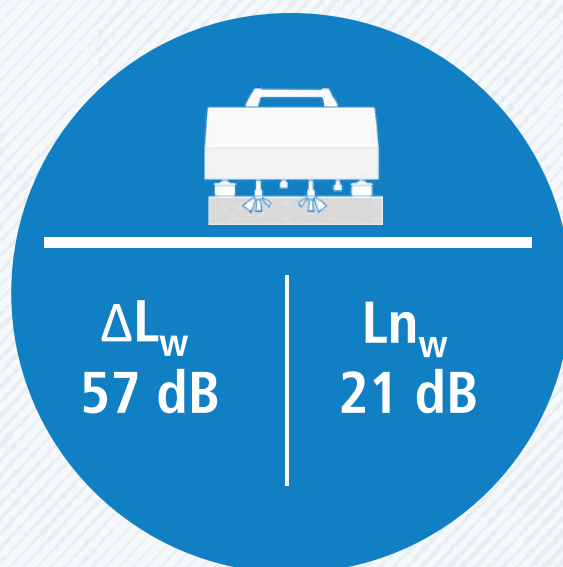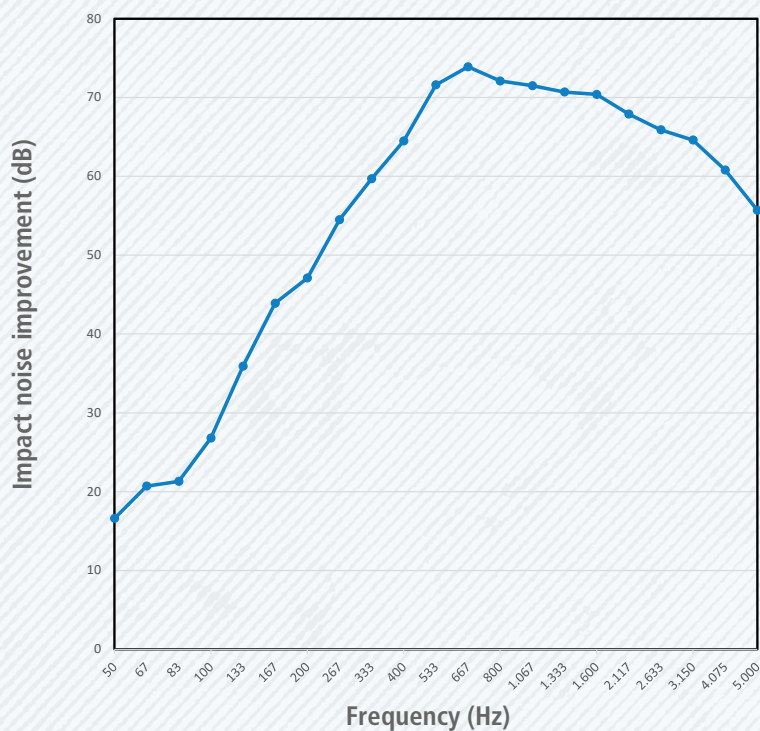

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19




sales@amcsa.es



www.mecanocaucho.com
www.akustik.com



AFS GYM Dry Floor Advance

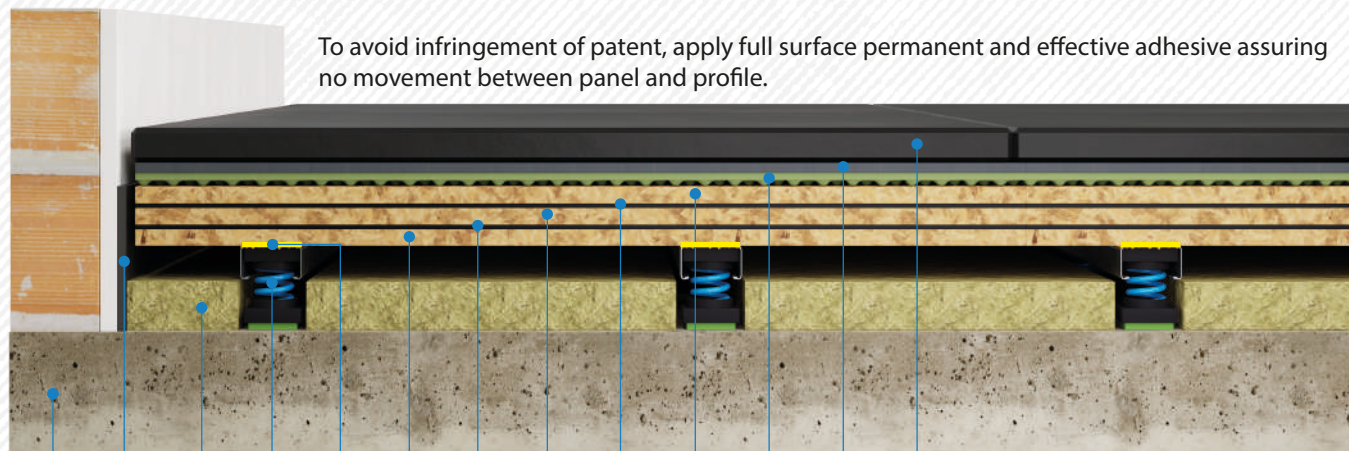


To avoid infringement of patent, apply full surface permanent and effective adhesive assuring no movement between panel and profile.

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13

- | | | |
|---------------------------------|----------------------------|---------------------------------|
| 1 Structural slab - 140mm | 6 OSB Board Type 3 - 18mm | 11 Getzner Mat 33 - 16mm |
| 2 Perimeter insulation | 7 Tabiabsorber 5 - 5mm | 12 Shock Absorb Base - 12.5mm |
| 3 Rock wool - 48mm | 8 OSB Board Type 3 - 18mm | 13 Rubber sports surface - 15mm |
| 4 AFS + Sylomer - 95mm | 9 Tabiabsorber 5 - 5mm | |
| 5 Permanent fixation - Adhesive | 10 OSB Board Type 3 - 18mm | |

AMC does not make installations of this system.


Impact noise improvement according to EN ISO 10140-3

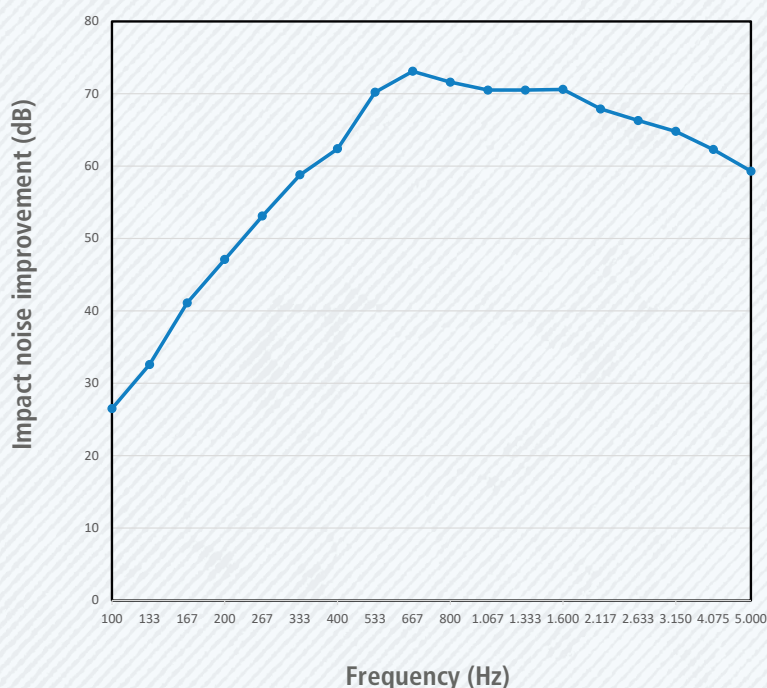



AFS GYM Dry Floor Pro

To avoid infringement of patent, apply full surface permanent and effective adhesive assuring no movement between panel and profile.


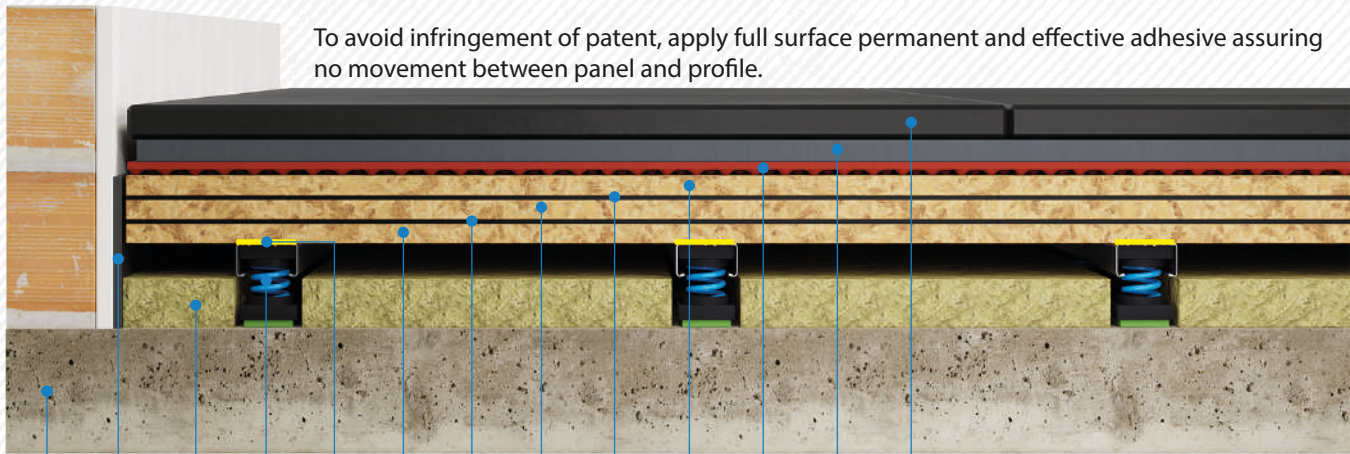


1 2 3 4 5 6 7 8 9 10 11 12 13

- | | | |
|---------------------------------|----------------------------|---------------------------------|
| 1 Structural slab - 140mm | 6 OSB Board Type 3 - 18mm | 11 Getzner Mat 35 - 11mm |
| 2 Perimeter insulation | 7 Tabiabsorber 5 - 5mm | 12 Shock Absorb Advanced - 25mm |
| 3 Rock wool - 48mm | 8 OSB Board Type 3 - 18mm | 13 Rubber sports surface - 15mm |
| 4 AFS + Sylomer - 95mm | 9 Tabiabsorber 5 - 5mm | |
| 5 Permanent fixation - Adhesive | 10 OSB Board Type 3 - 18mm | |

AMC does not make installations of this system.


Impact noise improvement according to EN ISO 10140-3

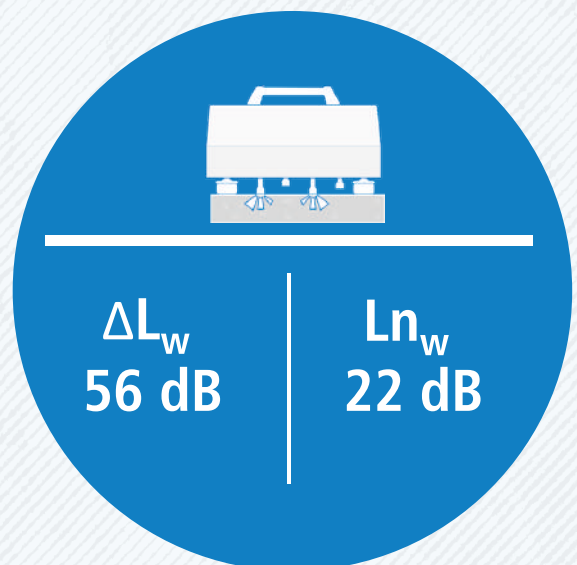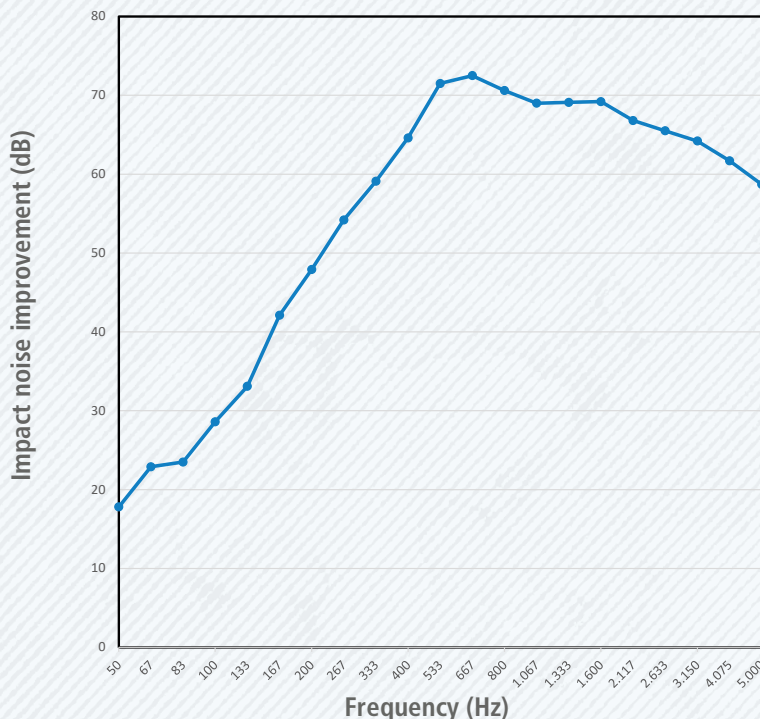



Noise level of free fall of weights


Tests carried out in Audiotec

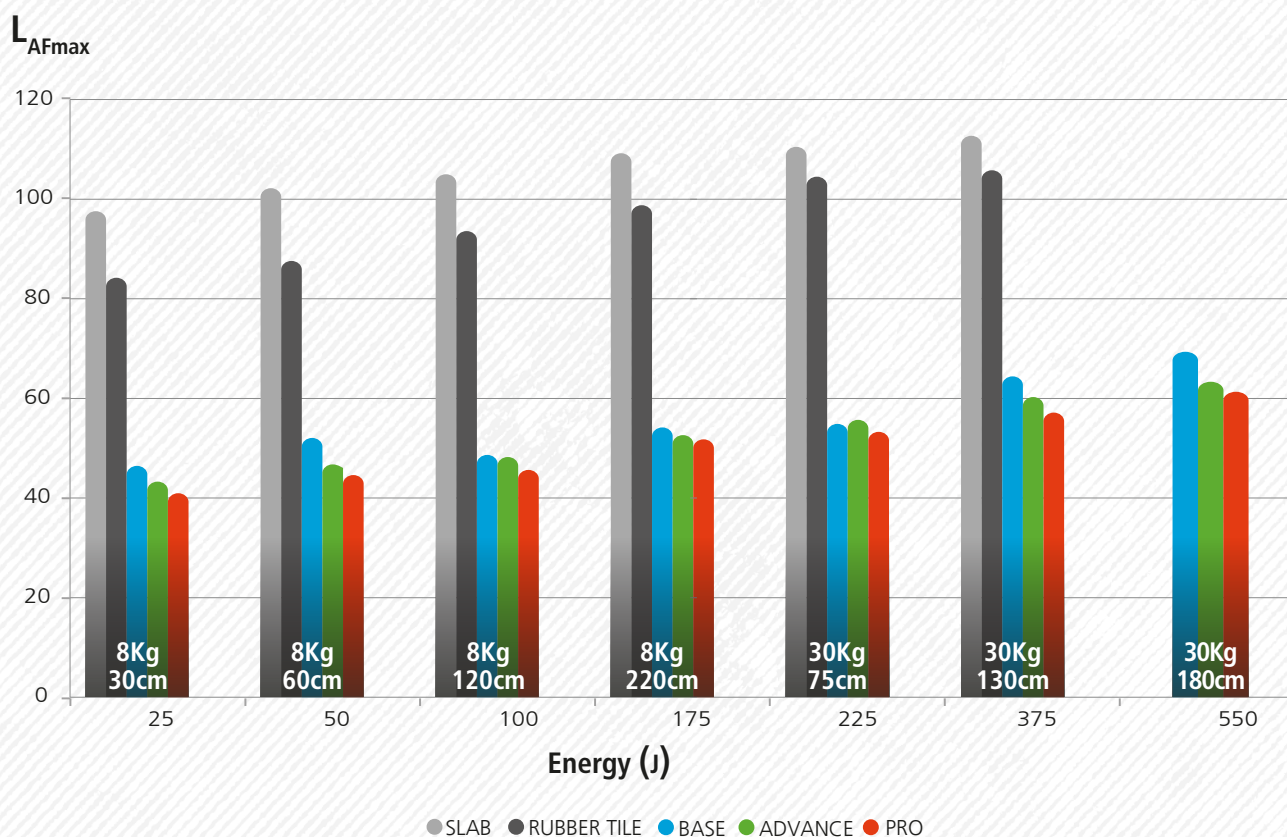

Normalized impact noise isolation

Tests carried out in Audiotec UNE EN ISO 10140-1:2016.

Impact noise results

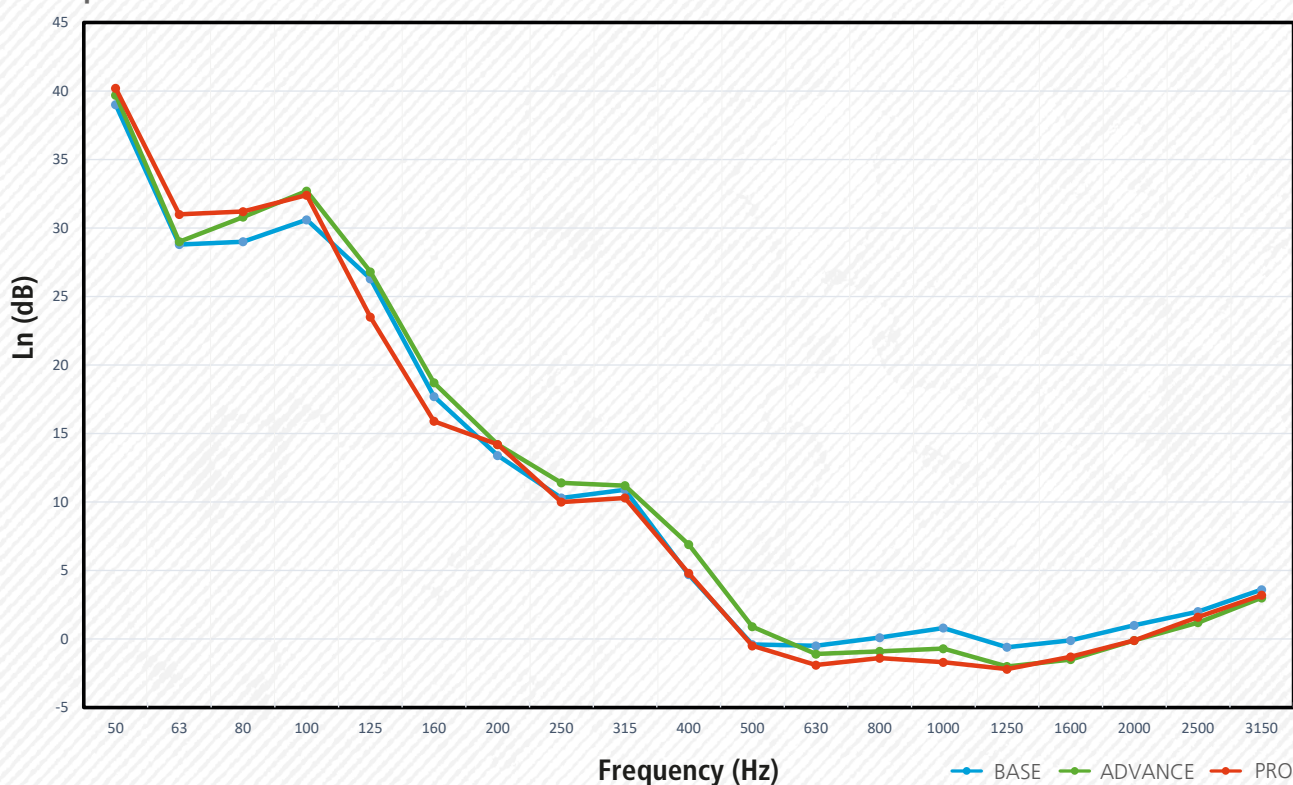

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19




sales@amcsa.es



www.mecanocaucho.com
www.akustik.com

Impact noise results

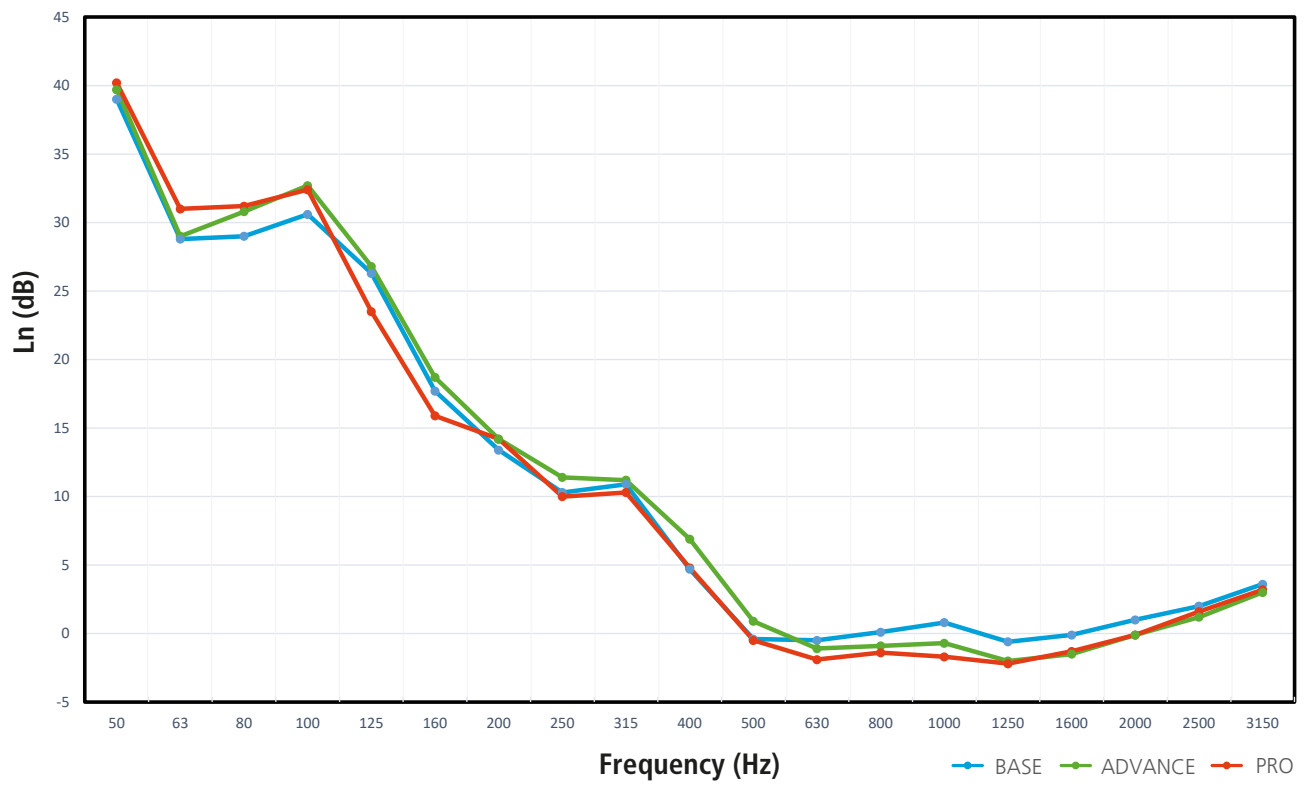

Christian Berner Oy +358 9 2766 830 • infofi@christianberner.com • christianberner.fi