

## Autobag® 650™ – Packaging machinery for large bags

The Autobag® 650™ is ideal for packaging medium to large products, such as spare parts or clothing, in bag sizes up to 400mm wide and 680mm long. Capable of cycling at speeds up to 40 bags per minute, this system was designed to maximise machine uptime while lowering total cost of ownership.

Next-bag-out printing is achieved with an advanced thermal transfer imprinter positioned directly over the next bag to be loaded. This ensures accuracy and efficiency in applications that require frequent product and label changeovers, prevents product queuing and eliminates a separate labelling operation.

State-of-the-art engineering has led to an innovative, inherently safe design. No light curtains or bulky guarding are required to achieve safe operation for hand load operations. The system is configurable for left or right-hand access to the HMI, cycle switch, and ribbon and bag loading areas, improving ergonomics and operator productivity. The Autobag 650 can be networked to facilitate full pack station integration and central monitoring. A 45 degree tilt option is available for orientating long or delicate products.

A simple, straightforward design with few moving parts reduces lifetime cost and improves reliability, while on-board diagnostics and modular components simplify maintenance.

When used with genuine Autobag pre-opened bags and AutoLabel™ Thermal Transfer Ribbon, the Autobag 650 ushers in the next evolution of high quality, reliable and flexible large bag packaging, backed by the industry's most comprehensive engineering and field service network.

### Markets Served

- Mail order and e-commerce fulfilment
- Prescription-by-mail
- Catalogue order
- Spare parts distribution
- Short-run with frequent changeovers in any market



## Features and Benefits

### Streamlined

Processor controlled servo motors, Ethernet-capable networking, and flexible mechanical design streamline integration

### Compact

Compact footprint minimises floor space

### Adjustable

Simple height adjustment and casters for operator comfort and portability

### Configuration Options

A 45 degree tilt option is available for orientating long or delicate products



### Largest Supply

We maintain standard bags and manufacture custom bags in up to 8 colours and a variety of special features



### Serviceability

Modular components and dedicated service access simplify maintenance and repairs to maximise uptime



### Flexible


Adjustable pass-through up to 150mm for maximum flexibility and packaging efficiency



## Optional Additions

- Handheld or Tabletop Bar Code Scanner
- Range of In-Feed Funnels
- Seal Flatteners
- Raised Unwind
- SimpleCount™ Counting System
- Bags-in-a-box Adapter

## Technical Information

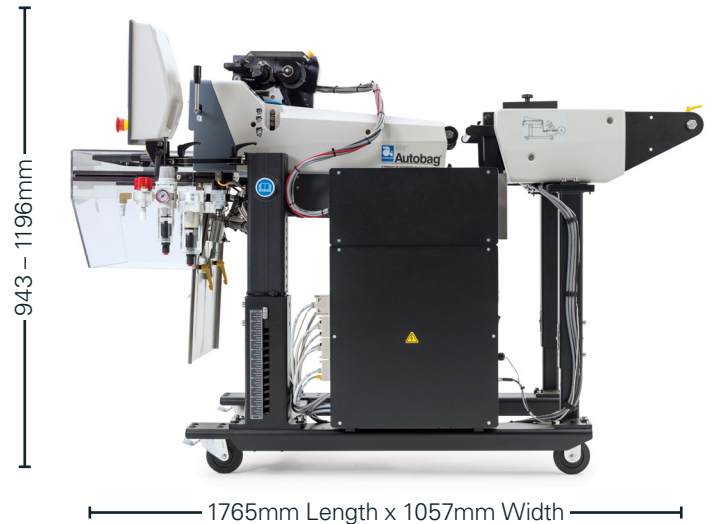

Weight	205kg
Electrical	Universal Input: 110V to 240V VAC, 50/60 Hz Power Consumption: 1800 Watts (VA) max
Air Feed	5 CFM/80 psi of clean, dry air
Pass-Through	150mm max
Bag Thickness	35 – 100µm
Bag Sizes	W 100 – 400mm L 140 – 680*mm *915mm unsupported
Weight Capacity	Up to 2.2kg (with load shelf)



**System Matched Bags**



**Service & Support**



**Custom Engineering & Integration**

☎ 01684 891 400 ✉ sales@autobag.co.uk 🌐 autobag.co.uk

🏠 Automated Packaging Systems, Enigma Business Park, Sandy's Road, Malvern, WR14 1JJ

© Jan 2016 Automated Packaging Systems. Features, Options & Technical Specifications subject to change. The use of the ® or ™ symbol indicates that Automated Packaging Systems, Inc. has registered or is otherwise claiming trademark rights in the United States. These marks may also be registered in other countries and common law rights may apply in countries where such rights are recognized. 01/16 2.5M