



Isotop® SD-BL


SD steel spring block element

- Natural frequency from 3.4 Hz
- High load capacity of up to 4,730 kg per element
- Top plate and base plate fitted with 6 mm Sylomer® anti-slip plate
- CDC coating of springs and powder coating of pressure
- plates for outstanding corrosion protection
- Secure connection between the plate and the spring thanks to special adhesive
- Top plate with M12 thread
- Simple load control thanks to open design


		Maximum load		Natural frequency	Packaging	Order
		in kg	in N	at maximum load	unit	number
SD-BL	Isotop® SD-BL2-71/81	690	6,769	3.4 Hz	4 pcs.	42417
	Isotop® SD-BL2-82/90	840	8,240	3.4 Hz	4 pcs.	42418
	Isotop® SD-BL2-80/92	1,050	10,301	3.4 Hz	4 pcs.	42419
	Isotop® SD-BL4-84/90	1,680	16,481	3.4 Hz	4 pcs.	42420
	Isotop® SD-BL4-82/92	1,890	18,541	3.4 Hz	4 pcs.	42421
	Isotop® SD-BL4-80/94	2,100	20,601	3.4 Hz	4 pcs.	42422
	Isotop® SD-BL6-84/92	2,730	26,781	3.4 Hz	10 pcs.	42423
	Isotop® SD-BL9-80/99	4,730	46,401	3.4 Hz	10 pcs.	42424

Not held in stock. Delivery time on request (approx. 15 working days from the factory). Customised block elements (spring combinations) available on request.


Isotop® SD-BL 2 (unladen)




Isotop® SD-BL 4 (unladen)



Isotop® SD-BL 6 (unladen)

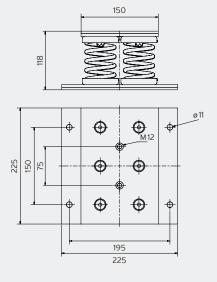

Isotop® SD-BL 9 (unladen)

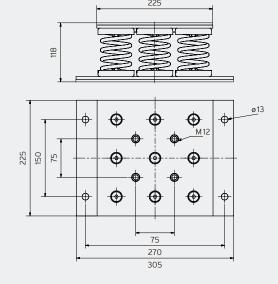







Bearing of pumps with additional mass

Roof-mounted AC system

Isotop® SD-BL

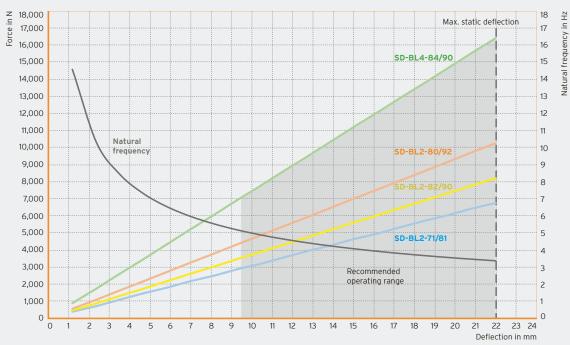

Isotop® SD-BL

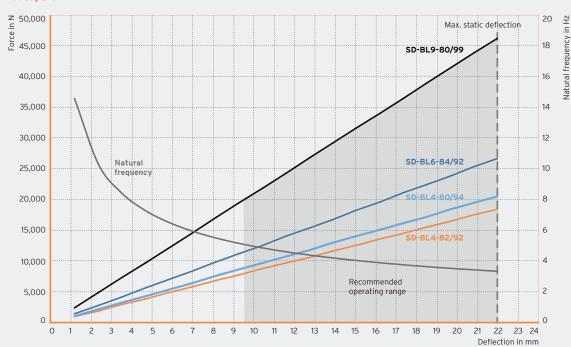

Ota yhteyttä: Christian Berner Oy +358 9 2766 830 • infofi@christianberner.com • www.christianberner.fi

