


**Sampling valve with membrane for
critical liquids**
**for process or storage tank and
sticky or solid bearing liquids**

PEMC[®]



Optional :

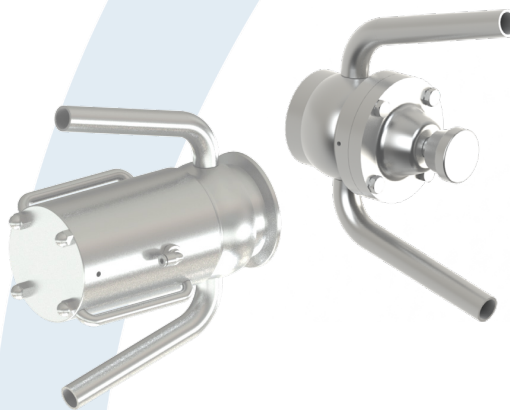

Membrane :



Optional
Membrane :



OVERVIEW :

The PEMC sampling valve is used to take a sample of liquid from a tank, whether clear, viscous, sticky or solid bearing, in order to carry out quality and/or bacterial controls. The PEMC valve is available in manual or automatic versions. Sealing is by a hung-type membrane on the drive head. The hygienic design with flush membrane (flared body) guarantees there is no retention zone (an ideal place for bacteria to develop) and is easy to clean. The valve has a connection dedicated to the passage of CIP liquid thereby enabling the sampling chamber to be cleaned.

KEY BENEFITS :

- ▲ Specially designed for liquids with high viscosity or containing solid particles
- ▲ Hygienic design with flared body
- ▲ Sterilisation by CIP/SIP circulation
- ▲ Available in manual and automatic versions

APPLICATIONS :

- ▲ Sampling on tank of all types of liquids, including sticky and/or solid bearing ones
- ▲ Equipment especially suited to sampling of products subject to quality and/or bacterial controls

TECHNICAL SPECIFICATIONS :

One size: DN 15

Intake connection: To weld

Outlet connections: Smooth

CIP connection: Smooth

Service pressure: From 0 to 6 bar

Service temperature: From 1 °C to 120 °C


CIP/SIP support: Up to a temperature of 130 °C for 20 to 30 minutes

Materials:

- Parts in contact with the product: 1.4404 (316L) stainless steel
- Sealing: VMQ membrane (Silicone)
- Other parts: 1.4404 (316 L) or 1.4307 (304 L) stainless steel

DIMENSIONS IN MM :

Sizes	DN 15 manual	DN 15 automatic
A	59,5	59,5
B	143,5	143,5
C	99	99
D	117	172,5
E	Ø 17,2 x 1,6	Ø 17,2 x 1,6

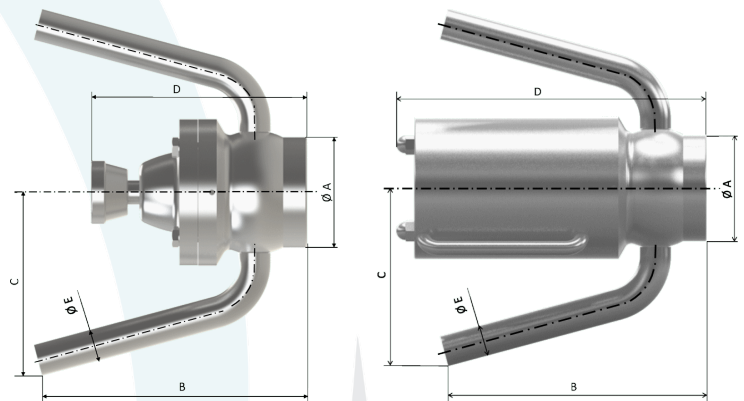

OPTIONS :

- Automatic version (single acting cylinder)
- Automatic version «ATEX 94/9/EC zones 1 & 2, gas and dust» certified
- Valve without CIP connection (if flame sterilisation)
- Other membranes: NBR (Nitrile rubber), EPDM (Ethylene Propylene Diene Monomer), FKM (Fluorocarbon rubber, eq. Viton®)
- Membrane USP Class VI compliant
- Special connections on request
- Customised equipment: please contact us

GUARANTEE :

12 months from the date of shipment (*except in the case of special conditions*)

COMPLIANCES :

- Ducting and tank accessories compliant with **European PED 2014/68/UE, §4.3**
- Optional: Compliant « **ATEX 2014/34/UE**, zones 1 & 2, gas & dust » for the automatic versions
- Membranes compliant with **FDA CFR 21.177.2600** and **1935/2004/EC** ruling
- Optional: Membrane **USP Class VI** compliant

SERVINOX follows the recommendations of international guidelines and standards relative to hygienic design and construction, in particular those of the EHEDG and 3-A.

Servinox makes every effort to update its documents in line with improvements to its products.